

SPCF.S08 VALVE SERIES

SAE Cartridge - 350 bar

Direct acting check valve

Pilot piston to open





DESCRIPTION


Cartridge style, normally closed, single pilot check valve. Cartridge is closed until sufficient pressure is applied on port 2 to reach the bias spring setting, lift the poppet and allow free flow to 3. The valve is normally closed from 3 to 2. When sufficient pressure is applied on port 1, the pilot piston lifts the poppet from its seat and allows flow from 3 to 2. Very limited leakage in the check condition. Version with higher pilot ratio.

CROSS SECTION

CAVITY
SAE08-2

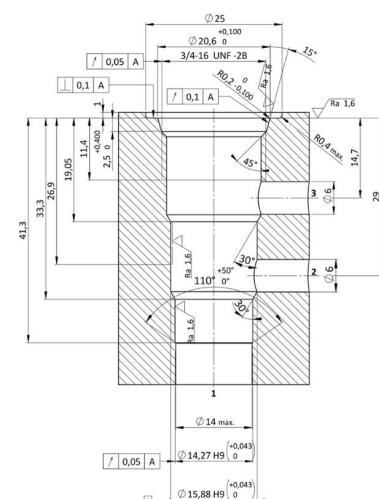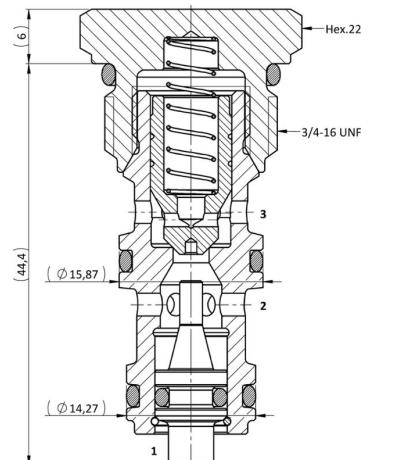

PERFORMANCE DETAILS

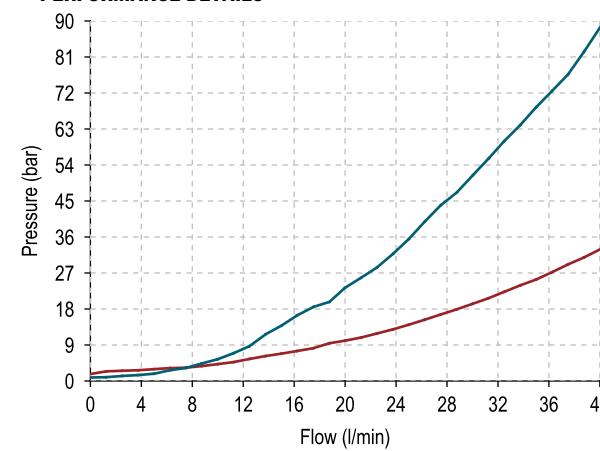


LEGEND

- Pilot piston activated (3vs2)
- Spring S

NOTE

The performance chart illustrates flow handling capacity for significant spring options.
p/Q curves are recorded at $T_{Oil} = 40^\circ C$ and 46 cSt.

HYDRAULIC SYMBOL



TECHNICAL DATA

MAXIMUM OPERATING PRESSURE	350 bar
MAXIMUM FLOW	40 l/min
MAXIMUM INTERNAL LEAKAGE	0,10 cm ³ / min @ 10 bar 0,10 cm ³ / min @ 350 bar
PILOT RATIO	4:1
EXTERNAL COMPONENT TREATMENT	Zn/Fe - standard (96h) Zn/Ni (720h) (Upon customer request)
O-RING TEMPERATURE RANGE	-30° C to 110° C (standard sealing NBR - BUNA - N) -35° C to 140° C (HNBR - Upon customer request) -23° C to 225° C (FKM - Upon customer request)
OIL TEMPERATURE RANGE	-30° C to 110° C
FLUIDS	Mineral - based or synthetics with lubricating properties
VISCOSITIES	7,4 to 420 cSt
FILTRATION	20/18/15 ISO 4406 (maximum filtration admitted)
ORIENTATION	No restrictions
INSTALLATION TORQUE	40-45 Nm
TECH. SPEC. FOR CHARACTERIZATION	see page 811
OIL TESTING CONDITIONS	ISO VG 46 cSt
SEAL KIT CODE	SK.047 (standard sealing NBR-BUNA-N)
WEIGHT	0,063 kg

ORDERING CODE

S | P | C | F

VALVE BASIC CODE

S | O | 8

0 | * |

0 | 0 | 0

000 = Standard configuration

MARKING

0 = Standard factory marking.
Customized marking can be done upon request.

SIZE

3/4-16 UNF with Ø15,87 and Ø14,27 nose sizes

BIAS SPRING OPTIONS

Spring model code	Cracking pressure (bar)
S	1,75